


CSC Standard High Energy Igniter Tips

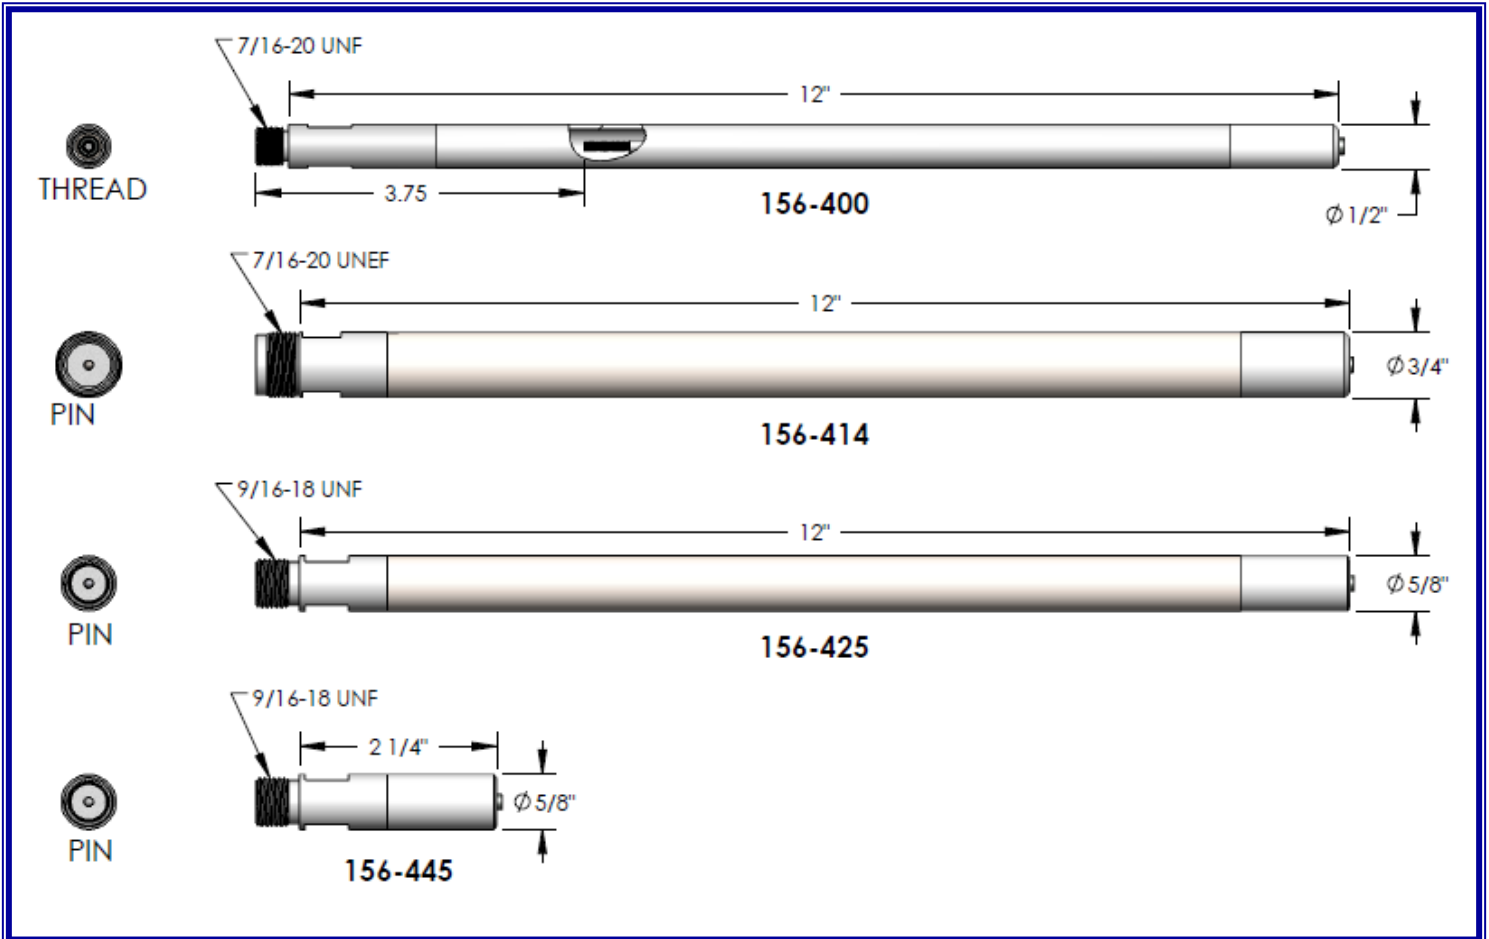

Igniter Tip General Information

CSC's Standard High Energy Igniter Tips are readily available in multiple different sizes and lengths. All of our Spark Tips are manufactured with the highest quality and heat resistant materials to ensure enhanced durability in high-heat applications. These tips feature a sealed design and a self-cleaning surface gap. The sparking of the tip creates a situation where the tip cleans the surface during operation. Tip end is designed to last for years under normal use.

Above notes a few of our standard, readily available options. Additional configurations are available, including OD, Length and Connections.

| | |
|----------|--|
| 156-400 | High Energy Igniter Tip, Pin, 7/16"-20, .50" OD, 12" Lg |
| 156-414* | High Energy Igniter Tip, Pin, 3/4"-20, .75" OD, 12" Lg |
| 156-425 | High Energy Igniter Tip, Pin, 9/16"-18, .625" OD, 12" Lg |
| 156-445 | High Energy Igniter Tip, Pin, 9/16"-18, .625" OD, 2.25" Lg |

*156-414 Igniter Tip also standardly available in 24" Length Option

